



## PI 500

### Hand-held instrument for industry

The new PI 500 is an all-purpose hand-held measuring instrument for many applications in industry like e. g.:

- Flow measurement
- Pressure/vacuum measurement
- Temperature measurement
- Moisture/dew point measurement

The graphic indication of coloured measurement curves is inimitably.

Up to 100 million measured values can be stored with date and name of measuring site. The measured values can be transferred to the computer by means of a USB stick.


The data can be comfortably evaluated with the CS Soft Basic software. Measured data

and service reports can be issued easily and quickly. The following sensors can be connected to the freely configurable sensor input of PI 500:

- Pressure sensor (high and low pressure)
- Flow sensors, VA 400/420
- Temperature sensors Pt 100, Pt 1000 / 4...20 mA
- Dew point sensors FA 410/FA 415
- Effective power meters
- Optional third-party sensors with the following signals: 0...1/10 V, 0/4...20 mA, Pt 100, Pt 1000, pulse, Modbus

### Special features:

- Universal sensor input for lots of common sensor signals
- Internal rechargeable Li-Ion batteries (approx. 12h continuous operation)
- 3.5" graphic display / easy operation via touch screen
- Integrated data logger for storage of the measured values
- USB interface for reading out via USB stick
- International: Up to 8 languages selectable



Measurement curves are indicated graphically and thus the user can see at a glance the behaviour of the dryer since the start of the measurement.



All physical parameters of moisture measurement are calculated automatically.



It is possible to store up to 100 million measured values. Each measurement can be stored with a comment, e.g. measuring site name. The time interval can be freely determined.



## PI 500

Flexible data recording and transfer via USB cable or USB stick



← integrated USB interface



The stored measured data can be easily transferred to the computer via a USB stick or via a USB cable.

The time periods are freely selectable or you just read out the whole memory.

The data can be evaluated by means of the software CS Soft Basic in table and in graphic form.


### World debut screenshot key

Ideal for documentation of the measured values/measurement curves on site. Coloured measurement curves can be sent by e-mail or integrated into a service report.

By means of the screenshot key the „current screen“ can be stored as an image file and printed out at the computer or edited without any additional software.

## Data evaluation in 5 languages by means of CS Soft Basic

Everything at a glance: Table, graph, statistics - at the touch of a button the user gets all necessary information.

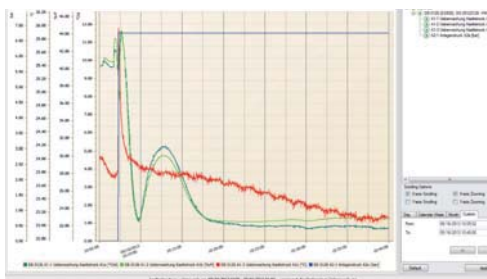

### Graphic evaluation

All measurement curves are indicated in terms of colour. All necessary functions such as zoom, selection/deselection of single measurement curves, freely selectable time periods, scaling of the axis, selection of colours and so on are integrated:

This view can be stored as a pdf file and sent by e-mail. Different data can be consolidated to a common file.

Time	DE-0126 (DS500) A1-1 Liebermaching Kaeltetrock A1a [°C]	DE-0126 (DS500) A1-2 Liebermaching Kaeltetrock A1b [°F]	DE-0126 (DS500) A1-3 Liebermaching Kaeltetrock A1c [°C]	DE-0126 (DS500) A2-1 Anlagendruck A2a [bar]
05/16/2013 10:07:20	10.1300	37.4600	25.7200	6.7700
05/16/2013 10:07:25	9.3700	38.4600	25.3050	6.7600
05/16/2013 10:07:30	11.2000	42.0000	25.0300	6.7600
05/16/2013 10:07:35	11.5500	43.7400	24.7300	6.7600
05/16/2013 10:07:40	11.6000	44.3200	24.5300	6.7600
05/16/2013 10:07:45	11.3300	43.6600	24.4050	6.7600
05/16/2013 10:07:50	10.9200	43.0000	24.3000	6.7600

### Table view

All measuring points are listed with exact time interval. The desired measuring channels with measuring site name can be selected via the diagram explorer.

**Statistic Report**

Timespan: 05/16/2013 10:05 - 05/16/2013 10:40

DE-0126

DE-0126 (DS500)	Unit	Average	Min	Max	Time of start	Time of stop
1 A1-1 Liebermaching Kaeltetrock A1a	°C	11.62	9.37	11.60	05/16/2013 10:07:20	05/16/2013 10:07:40
2 A1-2 Liebermaching Kaeltetrock A1b	°F	23.04	21.48	23.04	05/16/2013 10:07:20	05/16/2013 10:07:40
3 A1-3 Liebermaching Kaeltetrock A1c	°C	25.03	23.04	25.03	05/16/2013 10:07:20	05/16/2013 10:07:40
4 A2-1 Anlagendruck A2a	bar	6.76	6.76	6.76	05/16/2013 10:07:20	05/16/2013 10:07:40

### Statistics

All necessary statistic data are visible at a glance.

So the user can quickly see which minimum or maximum measured values occurred at which time and for how long.



## PI 500

### Hand-held instrument with large range of sensors




Description	Order No.
PI500 portable measuring instrument with integrated data logger, incl. power supply	0560 0511
Option for PI 500: "mathematics calculation function" for 4 freely selectable „virtual“ channels	Z500 5107
Option for PI 500: „Totalizer function for analogue signals“	Z500 5106
CS Soft Basic - data evaluation in graphic and table form - reading out of the measured data via USB	0554 7040
Transportation case	0554 6510

#### Technical data PI 500:

<b>Colour screen:</b>	3.5"-Touchpanel TFT transmissive, graphics, curves, statistics
<b>Interfaces:</b>	USB
<b>Power supply for sensors:</b>	Output voltage: 24 VDC $\pm$ 10% Output current: 120 mA continuous operation
<b>Current supply:</b>	Internal rechargeable Li-Ion batteries charging time approx. 4 h PI 500 operation: > 4h depending on current consumption of external sensors
<b>Power supply unit:</b>	100 - 240 VAC/50 - 60 Hz, 12 VDC - 1A Safety class 2, only for application in dry rooms
<b>Dimensions:</b>	82 x 96 x 245 mm
<b>Material:</b>	Plastic PC/ABS
<b>Weight:</b>	450 g
<b>Operating temperature:</b>	-20...70°C measuring gas temperature 0...50°C ambient temperature
<b>Storage temperature:</b>	-20 to +70°C
<b>EMC:</b>	DIN EN 61326
<b>Sensor inputs:</b>	for connection of pressure sensors, temperature sensors, clamp-on ammeters, third party sensors with 4...20mA, 0-10 V, Pt 100, Pt 1000
<b>Memory size:</b>	4 GB - SD memory card standard



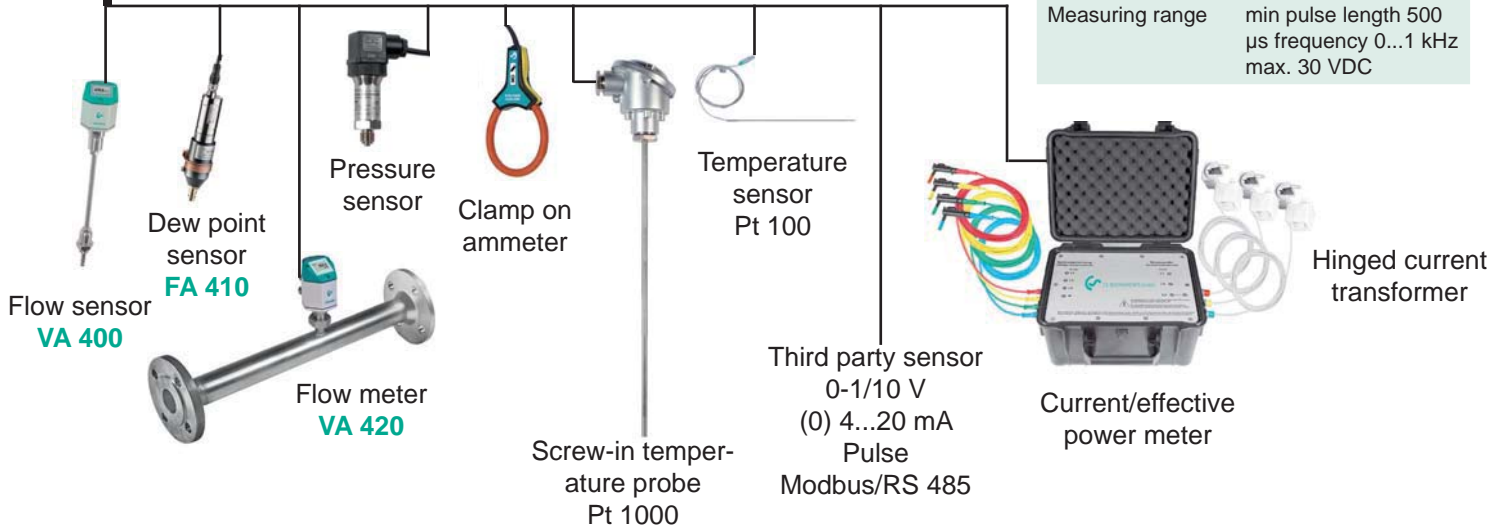


#### Input signals

<b>Current signal</b>	(0...20mA/4...20mA) internal or external power supply
Measuring range	0...20 mA
Resolution	0.0001 mA
Accuracy	$\pm$ 0.003 mA $\pm$ 0.05 %
Input resistance	50 $\Omega$
<b>Voltage signal</b>	(0...1 V) Measuring range
Measuring range	0...1 V
Resolution	0.05 mV
Accuracy	$\pm$ 0.2 mV $\pm$ 0.05 %
Input resistance	1 M $\Omega$
<b>Voltage signal</b>	(0...10 V / 30 V) Measuring range
Measuring range	0...10 V
Resolution	0.5 mV
Accuracy	$\pm$ 2 mV $\pm$ 0.05 %
Input resistance	1 M $\Omega$
<b>RTD Pt 100</b>	Measuring range
Measuring range	-200...850°C
Resolution	0.1°C
Accuracy	$\pm$ 0.2°C (-100...400°C) $\pm$ 0.3°C (further range)
<b>RTD Pt 1000</b>	Measuring range
Measuring range	-200...850°C
Resolution	0.1°C
Accuracy	$\pm$ 0.2° (-100...400°C)
<b>Pulse</b>	Measuring range
Measuring range	min pulse length 500 $\mu$ s frequency 0...1 kHz max. 30 VDC





## Suitable sensors for PI 500

Flow sensors VA 400:	Order No.	
Flow sensor VA 400-Max. Version (185 m/s) sensor length 220 mm, incl. 5 m cable to mobile instruments	0695 1122	
Flow sensor VA 400 High-Speed Version (224 m/s), sensor length 220 mm, 5 m cable to mobile instruments	0695 1123	
<b>Option for VA 400:</b>		
sensor length 120 mm	ZSL 0120	
sensor length 160 mm	ZSL 0160	
sensor length 300 mm	ZSL 0300	
sensor length 400 mm	ZSL 0400	
<b>Flow measuring range VA 420 for compressed air:(ISO 1217: 1000 mbar, 20°C)</b>		
Flow meter VA 420, 0,8... 90 l/min, (R 1/4" DN 8)	0695 0420	
Flow meter VA 420, 0,2... 90 m³/h, (R 1/2" DN 15)	0695 0421	
Flow meter VA 420, 0,3... 170 m³/h, (R 3/4" DN 20)	0695 0422	
Flow meter VA 420, 0,5... 290 m³/h, (R 1" DN 25)	0695 0423	
Flow meter VA 420, 0,7... 480 m³/h, (R 1 1/4" DN 32)	0695 0426	
Flow meter VA 420, 1,0... 550 m³/h, (R 1 1/2" DN 40)	0695 0424	
Flow meter VA 420, 2,0... 900 m³/h, (R 2" DN 50)	0695 0425	
<b>Dew point sensors:</b>		
FA 410 dew point sensor for mobile instruments, -80...+20°Ctd, incl. mobile measuring chamber, 5 m cable and perforated cap	0699 1411	
FA 415 dew point sensor for mobile instruments, -20...+50°Ctd, incl. mobile measuring chamber, 5 m cable and perforated cap	0699 1415	
<b>Connection cable for VA/FA sensors:</b>		
Connection cable for VA/FA series on mobile instruments, ODU / M12, 5m	0553 0503	
Extension cable for mobile instruments ODU/ODU, 10m	0553 0504	
<b>Calibration certificate for flow / dew point sensors:</b>		
5 point precision calibration with ISO certificate	3200 0001	
Precision calibration at -40 °Ctd incl. ISO certificate	0699 3396	
<b>Pressure sensors:</b>	<b>± 1 % accuracy of full scale</b>	<b>± 0,5 % accuracy of full scale</b>
Standard pressure sensor CS 16 from 0...16 bar	0694 1886	0694 3555
Standard pressure sensor CS 40 from 0...40 bar	0694 0356	0694 3930
Standard pressure sensor CS 1.6 from 0...1.6 bar abs.	0694 3551	0694 3550
Standard pressure sensor CS 100 from 0...100 bar, ± 1 % accuracy of full scale	0694 3557	
Standard pressure sensor CS 250 from 0...250 bar, ± 1 % accuracy of full scale	0694 3558	
Standard pressure sensor CS 400 from 0...400 bar, ± 1 % accuracy of full scale	0694 3559	
Precision pressure sensor CS -1...+15 bar, ±0.5 % accuracy of full scale	0694 3553	
Precision differential pressure sensor CS 400, 0...400 mbar differential pressure, 0.075% accuracy of full scale, static pressure max. 40 bar	0694 3560	
Calibration of pressure sensor 5 points between 0 and 10/16 bar	3200 0004	
<b>Temperature sensors:</b>		
Bendable temperature probe Pt 100 Class B, length 300 mm Ø 3 mm, -70...+500°C, 2 m probe connection cable glass fibre/stainless steel with ODU plug 8 pole for mobile instruments	0604 0106	
Screw-in temperature probe Pt 100 Class A, length: 300 mm with measuring transducer 4 to 20 mA = -50 to +500 °C ( 2-wire technology)	0693 0002	
Temperature probe cable Pt 100 Class A, length: 300 mm Ø 6 mm with 5 m connection cable with open ends	0604 0102	
Temperature probe cable Pt 100 Class A, length: 150 mm Ø 6 mm with 5 m connection cable with open ends	0604 0100	
Mini temperature probe cable Pt 100 Class A, length 25 mm, Ø 4 mm 50°C to +180°C, 5 m probe connection cable with open ends	0604 0105	
Compression fitting 6mm, G1/2", VA clamp ring	0554 6004	
Temperature calibration certificate 2 measuring points	0520 0180	



## Suitable sensors for PI 500

Connection cables for pressure sensors / temperature sensors:	Order No.
Connection cable for pressure, temperature or external sensors on mobile instruments, ODU / open ends, 5 m	0553 0501
Connection cable for pressure, temperature or external sensors on mobile instruments, ODU / open ends, 10 m	0553 0502
Extension cable for mobile instruments, ODU / ODU, 10 m	0553 0504
Clamp-on ammeters:	
Clamp-on ammeter 0...400 A TRMS incl. 5 m connection cable	0554 0511
Clamp-on ammeter 0...1000 A TRMS incl. 5 m connection cable	0554 0508
Calibration certificate for clamp-on ammeter	0554 3333
Current/effective power meter up to 100 A	<b>0554 5341</b>
Current/effective power meter up to 600 A	<b>0554 5342</b>
Mobile current/effective power meter with 3 external current transducers for big machines and plants External current transformers for clamping on cables (100 or 600 A) External magnetic measuring tips for measuring the voltage Measures kW, kWh, cos phi, kVar, kVA Data transfer to PI 500 via Modbus Incl. connection cable for mobile current/effective power meter to mobile instruments, 5 m	
Optional third-party sensors connectable:	
e.g. heat meters, current meters, gas meters, water meters and so on. To the freely assignable sensor input all sensors of CS Instruments can be connected as well as optional third-party sensors and counters with the following signal outputs: 4-20 mA, 0-20 mA I 0-1 V / 0-10 V / 0-30 V I Pt100 (2- or 3-wire), Pt 1000 (2- or 3-wire), KTY I pulse outputs (e.g. of gas counters) I Frequency output I Modbus protocol	



## Application: Portable flow measurement in production in front of machines and plants





## Set for dryer monitoring



°Ctd

bar

°C

1	PI 500 portable measuring instrument with integrated data logger, incl. power supply	0560 0511
2	FA 410 dew point sensor for mobile instruments, -80...+20°Ctd incl. mobile measuring chamber, 5 m cable	0699 1411
3	Standard Pressure sensor CS 16 from 0...16 bar, ± 1 % accuracy of full scale	0694 1886
4	Connection cable for pressure, temperature or external sensors to portable instruments, ODU / open ends, 5 m	0553 0501
5	Bendable temperature probe Pt100 Class B, length 300 mm, ø 3 mm, -70...+500°C, 2 m probe connection cable glass fibre/stainless steel with ODU plug 8 pole for portable instruments	0604 0106
6	CS Soft Basic - data evaluation in graphic and table form - reading out of the measured data via USB	0554 7040
7	Transportation case	0554 6510

## Set for portable flow measurement



m<sup>3</sup>/h

1	PI 500 portable measuring instrument with integrated data logger, incl. power supply	0560 0511
2	Flow meter VA 420, 0,3... 170 m <sup>3</sup> /h, (R3/4" DN 20)	0695 0422
3	Connection cable for VA/FA Series on mobile instruments, ODU / M12, 5 m	0553 0503
4	CS Soft Basic - data evaluation in graphic and table form - reading out of the measured data via USB	0554 7040
5	Transportation case	0554 6510



## Standard set compressed air



m<sup>3</sup>/h


°Ctd

bar

°C

1 PI 500 portable measuring instrument with integrated data logger, incl. power supply	0560 0511
2 Flow sensor VA 400-Max. Version (185 m/s) sensor length 220 mm, incl. 5 m cable to portable instruments	0695 1122
3 FA 410 dew point sensor for mobile instruments, -80...+20°Ctd incl. mobile measuring chamber, 5 m cable	0699 1411
4 Standard Pressure sensor CS 16 from 0...16 bar, ± 1 % accuracy of full scale	0694 1886
5 Connection cable for pressure, temperature or external sensors to portable instruments, ODU / open ends, 5 m	0553 0501
6 Bendable temperature probe Pt100 Class B, length 300 mm, ø 3 mm, -70...+500°C, 2 m probe connection cable glass fibre/stainless steel with ODU plug 8 pole for portable instruments	0604 0106
7 CS Soft Basic - data evaluation in graphic and table form - reading out of the measured data via USB	0554 7040
8 Transportation case	0554 6510

## Professional set compressed air

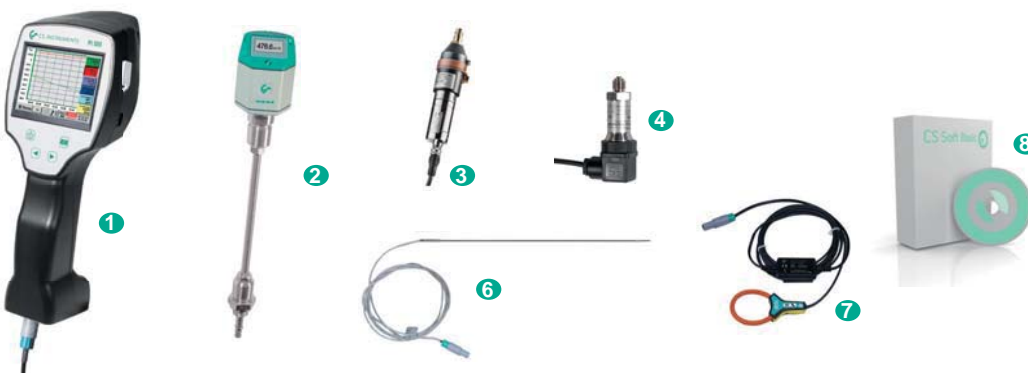

m<sup>3</sup>/h

°Ctd

bar

°C

A

1 PI 500 portable measuring instrument with integrated data logger, incl. power supply	0560 0511
2 Flow sensor VA 400-Max. Version (185 m/s) sensor length 220 mm, incl. 5 m cable to portable instruments	0695 1122
3 FA 410 dew point sensor for mobile instruments, -80...+20°Ctd incl. mobile measuring chamber, 5 m cable	0699 1411
4 Standard Pressure sensor CS 16 from 0...16 bar, ± 1 % accuracy of full scale	0694 1886
5 Connection cable for pressure, temperature or external sensors to portable instruments, ODU / open ends, 5 m	0553 0501
6 Bendable temperature probe Pt100 Class B, length 300 mm, ø 3 mm, -70...+500°C, 2 m probe connection cable glass fibre/stainless steel with ODU plug 8 pole for portable instruments	0604 0106
7 Clamp-on ammeter 0...400 A RMS 10-30 VDC for portable instruments, 3 m cable, ODU 8 pol.	0554 0511
8 CS Soft Basic - data evaluation in graphic and table form - reading out of the measured data via USB	0554 7040
9 Transportation case	0554 6510