


# AT2-607D

Explosion-Proof ATEX/IECEX Exd  
low differential pressure transmitter

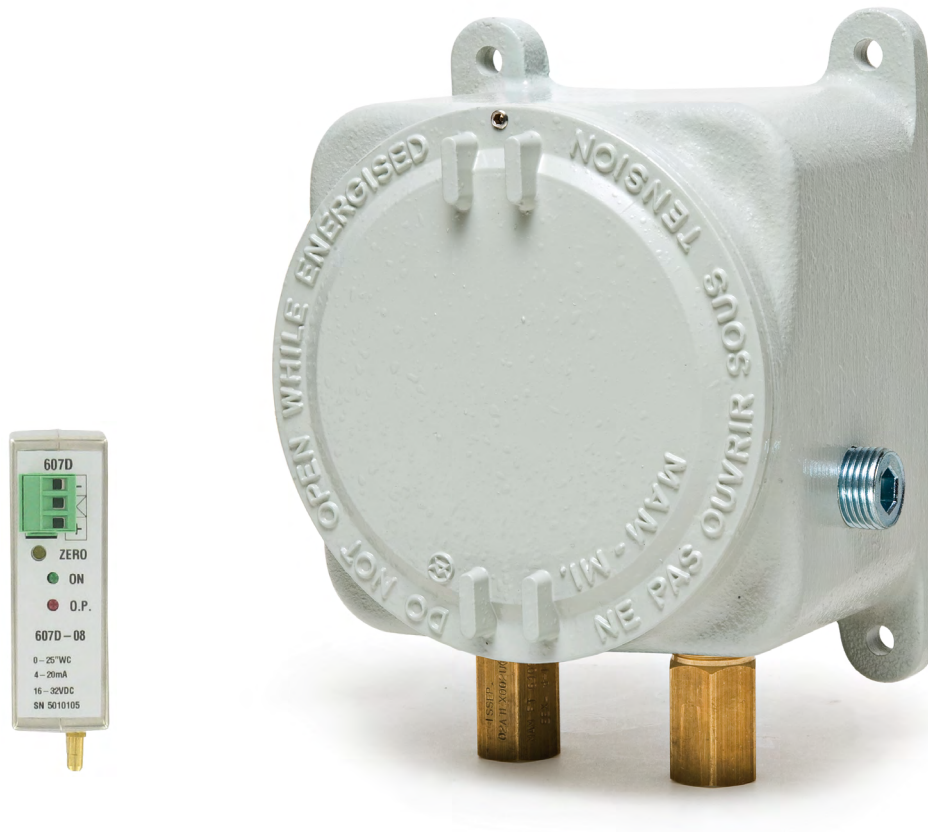

- Accuracy:  $\pm 0.25\%$  f.s.
- Ranges from 0.1 to 25 in w.c.

|                         |   |
|-------------------------|---|
| <b>ATEX</b>             | <p>CE 1370<br/>         II 2G Ex d IIC T6 Gb<br/>         II 2D Ex tb IIIC T85°C Db, <math>-60^{\circ}\text{C} \leq T_{\text{amb}} \leq +60^{\circ}\text{C}</math><br/>         Certificate: BVI 14 ATEX 0072</p> |
| <b>IECEX</b>            | <p>Ex d IIC T6 Gb<br/>         Ex tb IIIC T85°C Db<br/>         Certificate: IECEX EPS 14.0082</p>  |
| <b>ENCLOSURE RATING</b> | IP66 (IP65 with option OPV)   |



## AT2-607D SPECIFICATIONS

|                                |  |                             |
|--------------------------------|--|-----------------------------|
| <b>Service:</b>                | air and non-conductive, noncorrosive gases.  |                             |
| <b>Wetted materials:</b>       | 302 SS, glass, nickel, silicone rubber and brass.  |                             |
| <b>Accuracy:</b>               | ±0.25% f.s.* at room temperature<br>*RSS includes nonlinearity, hysteresis and nonrepeatability.   |                             |
| <b>Stability:</b>              | ±1% f.s. year  |                             |
| <b>Temperature limits:</b>     | operating and compensated:   | 0 to 170°F (-18 to 77°C)    |
|                                | storage:   | -65 to 185°F (-54 to 85°C)  |
|                                | case:  | -76 to 140°F (-60 to 60°C)* |
| <b>Pressure limits:</b>        | 15 psi (100 kPa)   |                             |
| <b>Power requirements:</b>     | 16 to 32 VDC   |                             |
| <b>Output signal:</b>          | 4 to 20 mA   |                             |
| <b>Zero adjustment:</b>        | potentiometer for zero   |                             |
| <b>Max loop resistance:</b>    | DC 0 to 800 Ohms   |                             |
| <b>Electrical connections:</b> | screw-type terminal block.   |                             |
| <b>Mounting orientation:</b>   | vertical, on a 1.378" (35 mm) DIN rail.  |                             |
| <b>Thermal effects:</b>        | includes zero and span ±0.01 f.s.°F, 20 to 170°F (-7 to 77°C)  |                             |
| <b>Response time:</b>          | approximately 10 ms. Additional delay in response time due to flame arrestors; from full scale to 0 up to 90 sec depending on model range. |                             |

## HOUSING

|                               |   |
|-------------------------------|---|
| <b>Material:</b>              | aluminium (stainless steel optional)  |
| <b>Finishing:</b>             | texture epoxy coat RAL7038 suitable for installation in harsh environments. |
| <b>Process connections:</b>   | 1/8" female NPT brass (stainless steel optional)                            |
| <b>Electrical connection:</b> | 1/2" NPT F (cable gland non included)                                       |
| <b>Dimensions:</b>            | see drawing below   |
| <b>Weight:</b>                | ab. 5 kg  |

\* Operating ambient temperature is defined also according to the options and pressure instrument choosed.

**CAUTION FOR USE ONLY WITH AIR OR COMPATIBLE GASES!  
CONTACT FACTORY FOR USE WITH GASES, OTHER THAN AIR AND NITROGEN.**

### IMPORTANT NOTES FOR INSTALLATION:

Cables must be fitted through 1/2" NPT cable gland or Atex/IECEX conduit (not supplied with instrument).

Make sure after cabling to close tight cover and cable gland, in order to keep IP66 rating (IP65 with option OPV, pressure relief valve).

Open cover only after de-energising instrument.


Attention: check local safety rules and warnings on unit and manual for a correct use



## STANDARD RANGES (OTHER RANGES AVAILABLE)

| Model   | OPERATING RANGES         |
|---------|--------------------------|
| 607D-01 | 0 - 0,1 in w.c.          |
| 607D-02 | 0 - 0,25 in w.c.         |
| 607D-03 | 0 - 0,5 in w.c.          |
| 607D-04 | 0 - 1 in w.c.            |
| 607D-05 | 0 - 2,5 in w.c.          |
| 607D-06 | 0 - 5 in w.c.            |
| 607D-07 | 0 - 10 in w.c.           |
| 607D-08 | 0 - 25 in w.c.           |
| 607D-11 | 0,05 - 0 - 0,05" in w.c. |
| 607D-12 | 0,1 - 0 - 0,1" in w.c.   |
| 607D-13 | 0,25 - 0 - 0,25" in w.c. |
| 607D-14 | 0,5" - 0 - 0,5" in w.c.  |
| 607D-15 | 1,0 - 0 - 1,0" in w.c.   |

## DIMENSIONS

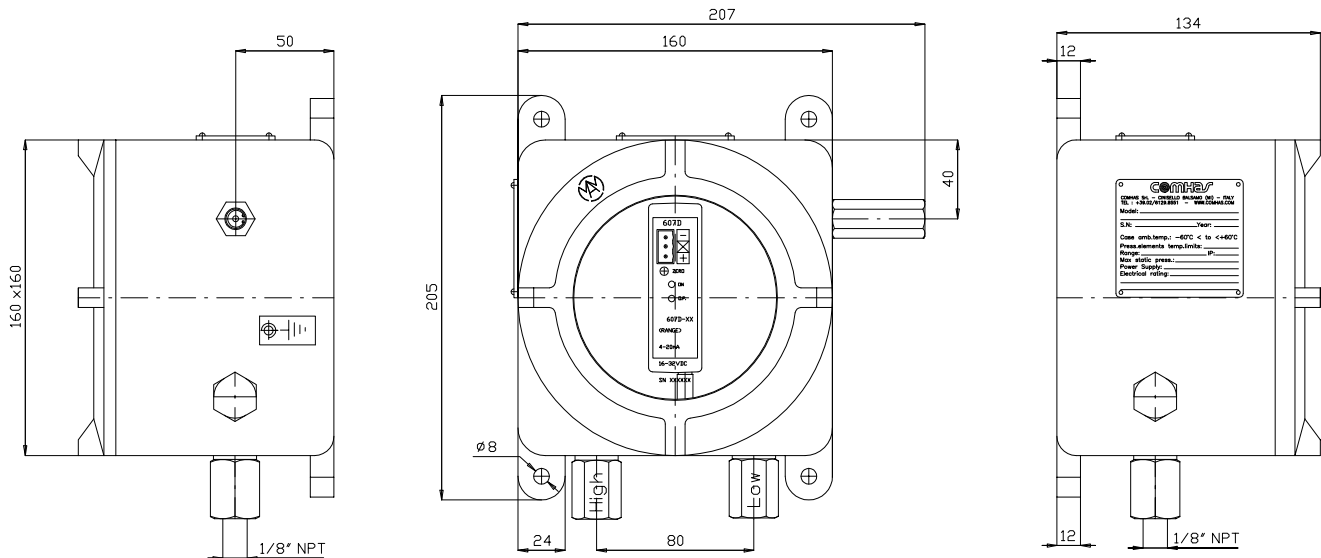

Consult factory for different holes layout.



## MODEL CONFIGURATION

| CODE                                       | AT2   | -          | 607D | - | - | - | - | - | - | - | - | - | - | - | - | - | - | -   | - |     |
|--|---|------------|------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|-----|---|-----|
| Housing                                    |   |            | 607D |   |   |   |   |   |   |   |   |   |   |   |   |   |   |     |   |     |
| Ranges                                     | 0 - 0,1 in w.c.   |            |      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |     |   |     |
|  | 0 - 0,25 in w.c.  |            |      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |     |   |     |
|  | 0 - 0,5 in w.c.   |            |      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |     |   |     |
|  | 0 - 1 in w.c.   |            |      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |     |   |     |
|  | 0 - 2,5 in w.c.   |            |      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |     |   |     |
|  | 0 - 5 in w.c.   |            |      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |     |   |     |
|  | 0 - 10 in w.c.  |            |      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |     |   |     |
|  | 0 - 25 in w.c.  |            |      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |     |   |     |
|  | 0,05 - 0 - 0,05" in w.c.                                      |            |      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |     |   |     |
|  | 0,1 - 0 - 0,1" in w.c.  |            |      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |     |   |     |
|  | 0,25 - 0 - 0,25" in w.c.                                      |            |      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |     |   |     |
|  | 0,5" - 0 - 0,5" in w.c.                                       |            |      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |     |   |     |
|  | 1,0 - 0 - 1,0" in w.c.  |            |      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |     |   |     |
|  | Case material   | Alluminium |      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |     |   |     |
| Stainless steel (s.s. connection included) |   |            |      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |     |   |     |
| Housing options                            | Blind top cover   |            |      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |     |   |     |
|  | Glass transparent cover                                       |            |      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |     |   |     |
|  | 1/8" NPT F brass pressure port                                |            |      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |     |   |     |
|  | 1/8" NPT F stainless steel (only for aluminium housing)       |            |      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |     |   |     |
|  | Standard - without overpressure relief valve                  |            |      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |     | X |     |
|  | Overpressure relief valve* (material: same as pressure ports) |            |      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |     |   | OPV |
|  | Stainless steel tag   |            |      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |     |   | T2  |
| Other options                              | See "other options" - Possible more than one option           |            |      |   |   |   |   |   |   |   |   |   |   |   |   |   |   | ... |   |     |

\*IP65 in case of relief valve installation (OPV). Relief valve is used to keep atmospheric pressure inside the case.  
Suggested in case of risk of having static pressure  $\geq 19$  Bar (static pressure admitted is indicated on tag and it will be anyway always  $< 19$  bar).

ACCESSORIES: Atex cable gland.

Dimensions may change without any advice.

